
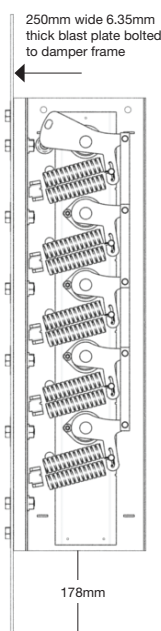


Blast Protection Damper

BL-201 Series

Blast plate shown as transparent

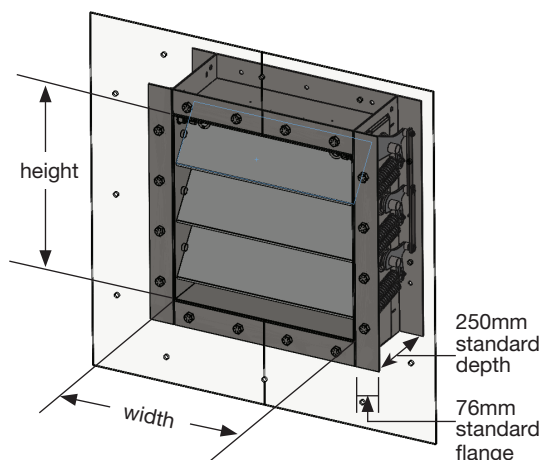

Application

- The BL-201 Series damper is designed for protection against sudden blasts and instantaneous pressure changes. Typical use is the protection of vent openings and/or HVAC supply & exhaust openings in exterior building walls.
- Blast pressures up to 65 psi. Complies with UFC 4-010-01 performance requirements for High Level of Protection, and GSA Level D blast loading
- Vertical and horizontal mounting applications. Surface mounting or duct flange mount
- ATEX certified for use in explosive atmospheres. Ambient temperature up to 195°C
- Max air velocity: 20 m/s.

Standard Construction

- Frame: 76x250x76mm, 10 ga. (3.4mm) carbon steel channel
- 250mm wide x 6.35mm thick blast plate for surface mount applications
- Blades: 3.4mm carbon steel double skin airfoil
- Blade Lock: Latch mechanism to lock blades in closed position after blast
- Axles: Ø 25.4mm solid HSLA steel (ASTM 588)
- Linkage: 6.35mm thick x 19mm wide bars
- Bearings: Two hole flange sealed ball bearings (type II)
- Stainless steel springs (to hold blades in open position)
- Finish: Gray primer for rust prevention

Min. Size* 200mm x 200mm

Max. Single Section* 1220mm x 1524mm (see graph for blast pressure limitations).

Max. Multi-Section* 2440mm x 1524mm (subject to blast pressure limitations)

*as measured to inside frame dimensions

Options

- Powder coating
- Stainless steel construction (ASTM-A240, SA240, AMS 5513)
- Galvanized steel construction
- Blast deflector on jambs
- Equalizing/debris grid (-GR models)
- Combined damper assembly with MAT BD-200-HD fire resistant pressure relief damper

Models BL-201, BL-201-GR


6235 South Oak Park Avenue Chicago, IL 60638 USA
Toll free: 800.585.7686 +1.708.552.4040
Fax: +1.708.594.0396 www.metairtech.com

Represented by:

Blast Protection Damper

BL-201 Series

Total Reflective Pressure vs. Blast Damper Width

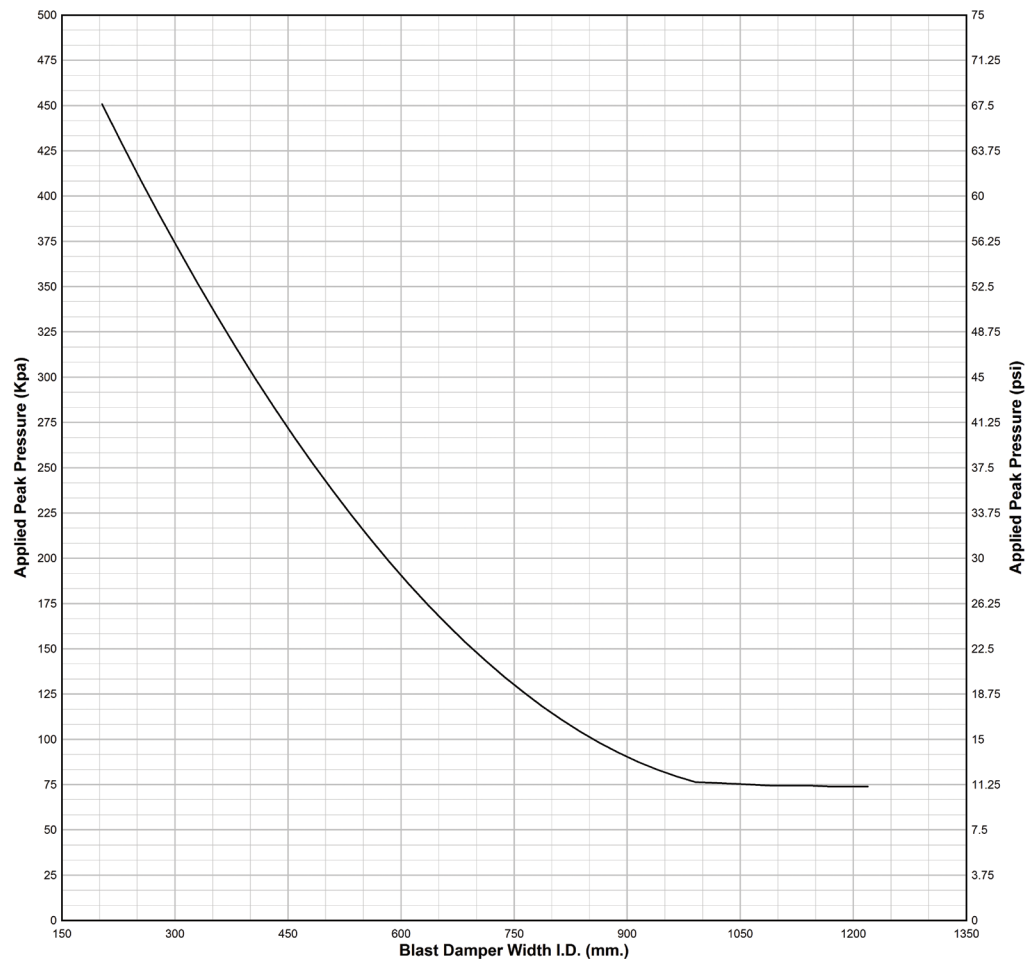

Note: Multi-section dampers may be required to meet high overpressure ratings

Shock Tube Testing: 32"x32" I.D. Blast Damper * Model BL-201				
Test	Test Specimen	Applied Peak Pressure (psi)	Applied Positive Phase Impulse (psi-ms)	Positive Phase Duration (ms)
1	1	16.3	1477	312.4
2	2**	3.2	128	77.1
3	2**	5.8	229	83.2
4	2**	8.7	370	103.4
5	2**	11.1	753	203.5
6	2**	16.2	1439	322.4
Shock Tube Testing: 48"x48" I.D. Blast Damper *** Model BL-201				
1	1	11.6	92	14.13

*Shock Testing of the 32"x32" Blast Damper was performed by Baker Risk Structural Component Testing Labs.

**Tests 2-6 were performed consecutively on the same test specimen.

***Shock Testing of the 48"x48" Blast Damper was performed by ATI-Intertek Architectural Testing Lab.

Represented by:

6235 South Oak Park Avenue Chicago, IL 60638 USA
Toll free: 800.585.7686 +1.708.552.4040
Fax: +1.708.594.0396 www.metairtech.com

Blast Protection Damper

Model BL-201 Performance Data

Tested per AMCA Standard 500-D (fig. 5.1)
At Standard Air Density

12"x 12"			
Face Velocity		Pressure Drop	
ft/m	m/s	in. H ₂ O	Pa.
2997.0	15.2	7.1	1765.5
2490.0	12.6	5.0	1233.0
1987.0	10.1	3.2	801.0
1492.0	7.6	1.8	454.6
927.0	4.7	0.7	177.9

12"x 48"			
Face Velocity		Pressure Drop	
ft/m	m/s	in. H ₂ O	Pa.
3265.0	16.6	7.7	1912.1
2627.0	13.3	5.0	1252.4
1980.0	10.1	2.8	706.5
1323.0	6.7	1.2	310.6
664.0	3.4	0.3	79.1

24"x 24"			
Face Velocity		Pressure Drop	
ft/m	m/s	in. H ₂ O	Pa.
3382.0	17.2	10.9	2718.6
2719.0	13.8	7.0	1743.1
2217.0	11.3	4.7	1160.3
1725.0	8.8	2.8	703.5
1239.0	6.3	1.4	356.6

36"x 36"			
Face Velocity		Pressure Drop	
ft/m	m/s	in. H ₂ O	Pa.
2971.0	15.1	8.1	2023.3
2394.0	12.2	5.2	1300.7
1798.0	9.1	2.9	709.9
1198.0	6.1	1.2	306.1
593.0	3.0	0.3	74.4

48"x 12"			
Face Velocity		Pressure Drop	
ft/m	m/s	in. H ₂ O	Pa.
2880	14.6304	8.884	2210.6946
2318	11.77544	5.8	1443.272
1740	8.8392	3.228	803.25552
1166	5.92328	1.457	362.55988
588	2.98704	0.364	90.57776



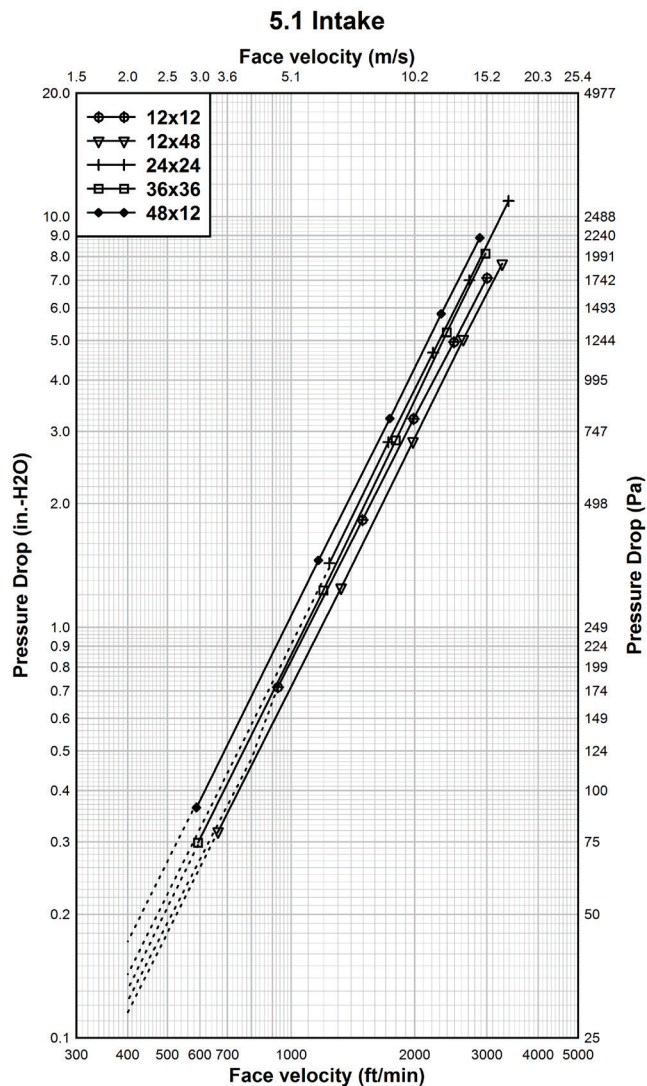


Figure 5.1- Test Device Setup with Outlet Duct
Intake Application

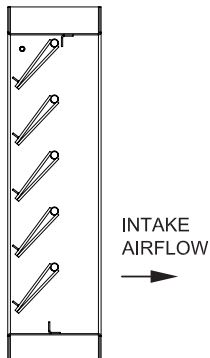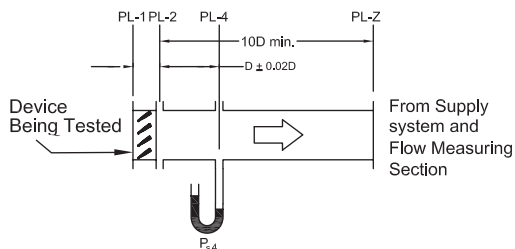

Metropolitan Air Technology certifies that model BL-201 blast damper shown heron (or herein) is licensed to bear the AMCA Listing Label. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Rating Seal applies to Air Performance.

Blast Protection Damper

Model BL-201 Performance Data

Tested per AMCA Standards 500-D fig. 5.2
At Standard Air Density


12"x 12"			
Face Velocity		Pressure Drop	
ft/m	m/s	in. H ₂ O	Pa.
2625.0	13.3	7.3	1827.0
2463.0	12.5	6.4	1602.3
1971.0	10.0	4.1	1029.9
1493.0	7.6	2.4	590.2
920.0	4.7	0.9	217.7

12"x 48"			
Face Velocity		Pressure Drop	
ft/m	m/s	in. H ₂ O	Pa.
3746.0	19.0	3.8	936.6
3011.0	15.3	2.5	621.4
2256.0	11.5	1.5	364.3
1500.0	7.6	0.7	171.7
740.0	3.8	0.2	43.8

24"x 24"			
Face Velocity		Pressure Drop	
ft/m	m/s	in. H ₂ O	Pa.
3425.0	17.4	4.7	1181.0
2751.0	14.0	3.1	773.4
2063.0	10.5	1.8	450.6
1383.0	7.0	0.9	215.0
677.0	3.4	0.2	54.0

36"x 36"			
Face Velocity		Pressure Drop	
ft/m	m/s	in. H ₂ O	Pa.
2824.0	14.3	2.9	732.1
2261.0	11.5	1.9	484.2
1696.0	8.6	1.2	289.6
1130.0	5.7	0.5	134.1
560.0	2.8	0.1	33.3

48"x 12"			
Face Velocity		Pressure Drop	
ft/m	m/s	in. H ₂ O	Pa.
3117	15.83436	5.736	1427.34624
2505	12.7254	3.864	961.51776
1881	9.55548	2.234	555.90856
1250	6.35	1.002	249.33768
611	3.10388	0.243	60.46812



EXHAUST
AIRFLOW


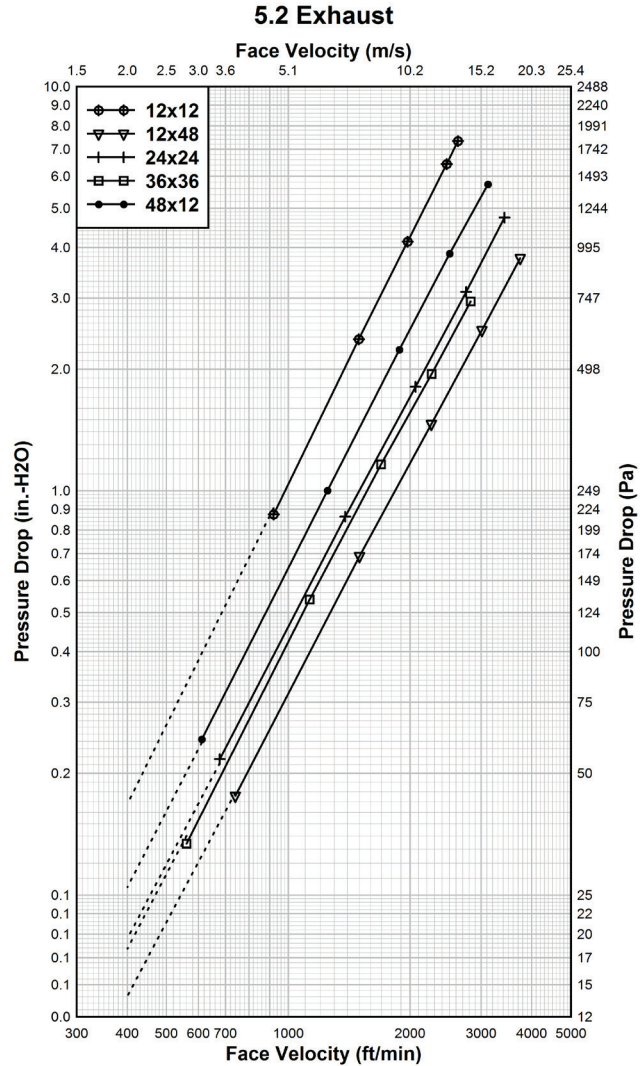


Figure 5.2- Test Device Setup with Inlet Duct Exhaust Application

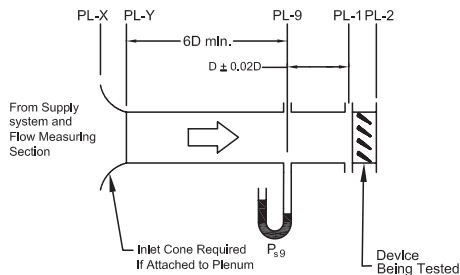

Metropolitan Air Technology certifies that model BL-201 blast damper shown heron (or herein) is licensed to bear the AMCA Listing Label. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Rating Seal applies to Air Performance.

Represented by:

6235 South Oak Park Avenue Chicago, IL 60638 USA
Toll free: 800.585.7686 +1.708.552.4040
Fax: +1.708.594.0396 www.metairtech.com

Blast Protection Damper

BL-201 Series

DAMPER FREE AREA CHART (sqm)


WIDTH (OUTSIDE FRAME DIMENSION)

HEIGHT (OUTSIDE FRAME DIMENSION)		350	400	500	600	700	800	900	1000	1100	1200	1300	1350
	350	0.018	0.022	0.031	0.040	0.049	0.058	0.066	0.075	0.084	0.093	0.102	0.106
	400	0.021	0.026	0.036	0.046	0.057	0.067	0.077	0.088	0.098	0.108	0.119	0.124
	500	0.028	0.035	0.049	0.063	0.077	0.091	0.105	0.119	0.133	0.147	0.161	0.168
	600	0.041	0.051	0.071	0.092	0.112	0.133	0.153	0.174	0.194	0.214	0.235	0.245
	700	0.048	0.060	0.084	0.107	0.131	0.155	0.179	0.203	0.227	0.251	0.275	0.286
	800	0.058	0.073	0.102	0.131	0.160	0.190	0.219	0.248	0.277	0.306	0.335	0.350
	900	0.071	0.089	0.124	0.160	0.196	0.231	0.267	0.302	0.338	0.373	0.409	0.427
	1000	0.079	0.099	0.138	0.178	0.217	0.257	0.296	0.336	0.375	0.415	0.454	0.474
	1100	0.089	0.111	0.155	0.199	0.244	0.288	0.332	0.377	0.421	0.465	0.510	0.532
	1200	0.094	0.118	0.165	0.213	0.260	0.307	0.354	0.401	0.449	0.496	0.543	0.567
	1300	0.112	0.140	0.196	0.251	0.307	0.363	0.419	0.475	0.531	0.587	0.643	0.670
	1400	0.121	0.152	0.213	0.273	0.334	0.395	0.456	0.516	0.577	0.638	0.699	0.729
	1500	0.132	0.165	0.231	0.296	0.362	0.428	0.494	0.560	0.626	0.692	0.758	0.790
	1600	0.139	0.174	0.243	0.313	0.382	0.452	0.521	0.590	0.660	0.729	0.799	0.834
1650	0.148	0.184	0.258	0.332	0.406	0.479	0.553	0.627	0.701	0.774	0.848	0.885	


Free Area Chart Not Certified by AMCA

Blast Protection Damper

BL-201 Series Mounting Arrangements




Single Section

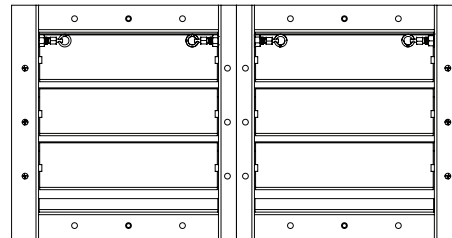


Multi-Section

Vertical Mounting Arrangements


#1

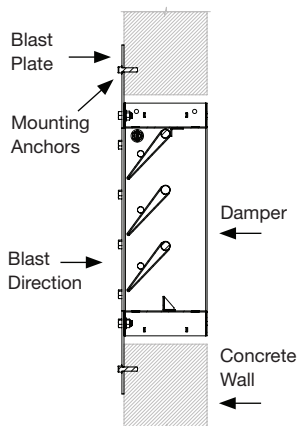


#2

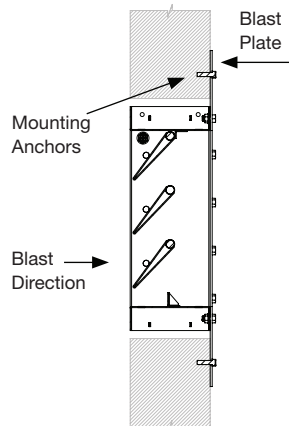

#3

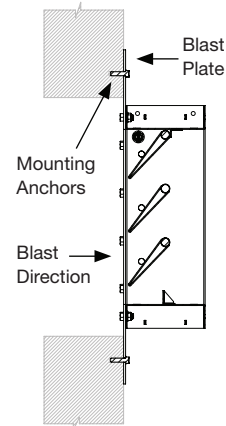


#4

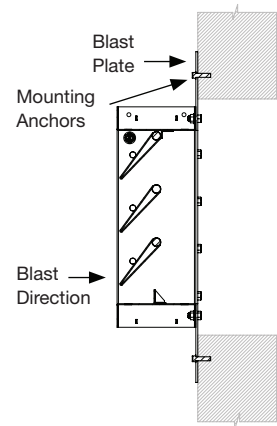


Horizontal Mounting Arrangements


#H1

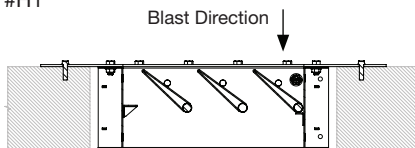


#H2

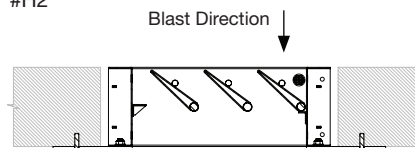


#H3

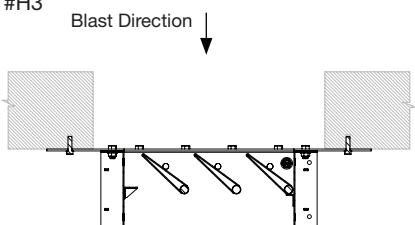

#H4

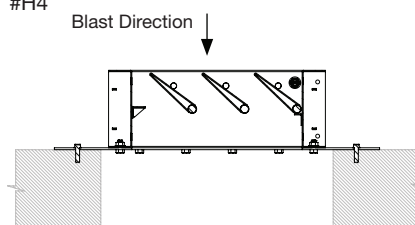

Duct Mounting Arrangement

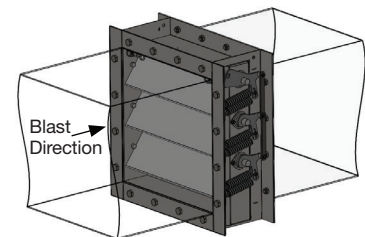

Dampers can be mounted in concrete or steel walls, and in ductwork. See MAT Model BL-201 Installation Instructions for mounting details and installation requirements.

Blast Protection Damper

BL-201 Series

Suggested Specification

Furnish at locations shown in plans or in accordance with schedules, industrial grade blast dampers meeting the following construction standards. Frame shall be minimum 250mm deep x 75mm flange 10 gage carbon steel channel. Sleeve with inner frame is not acceptable. Blades shall be maximum 175mm wide, minimum 10 ga. carbon steel airfoil shaped double-skin. A 250mm wide x 6.35mm thick steel blast plate to be bolted to front flange. Axles shall be continuous 25mm diameter HSLA steel (ASTM 588) welded to blades. Linkage shall be 6.35mm thick, 19mm wide bar located on side of damper outside of airstream.

Linkages shall include externally mounted release springs to keep damper open until blast pressure forces blades closed. Damper shall include blade locks for protection against a delayed exothermic reaction (a moving flame front) and the negative pressure wave. Damper shall be tested by an independent lab at equally spaced successive overpressures up to 1 bar, using the shock tube method. Dampers shall be pressure drop tested in accordance with AMCA Standard 500-D. Damper shall be Metropolitan Air Technology's Model BL-201 blast damper. Add "-GR" suffix for equalizing grid.

SALES CONTACT



www.airmax-hvac.com



080-614-4944, 063-268-8080



@airmax (Line Official)



windcontrol.info@gmail.com



Address

เลขที่ 56/392 หมู่ที่ 12
ตำบลศีรษะจรเข้น้อย
อำเภอบางเสาธง
จังหวัดสมุทรปราการ
10540

