


Ceiling Mount Types


Model : CFM

- New design with Super Low noise
 - Forward Blade size 150 – 200 mm
 - Casing and Louver made from steel with anticorrosive color
 - Maintenance free for ball bearing
 - Single wind shield for anti-back spin of Air flow
 - Completed with thermal fuse to cut electric off when motor has High temperature
- air volume 120-960 m³/h , (70-565 cfm)

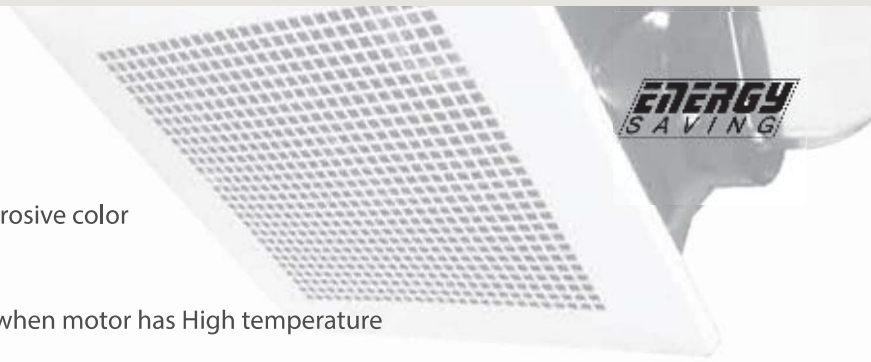



ไม่ได้มาเข้าแล้ว

PERFORMANCE CURVE

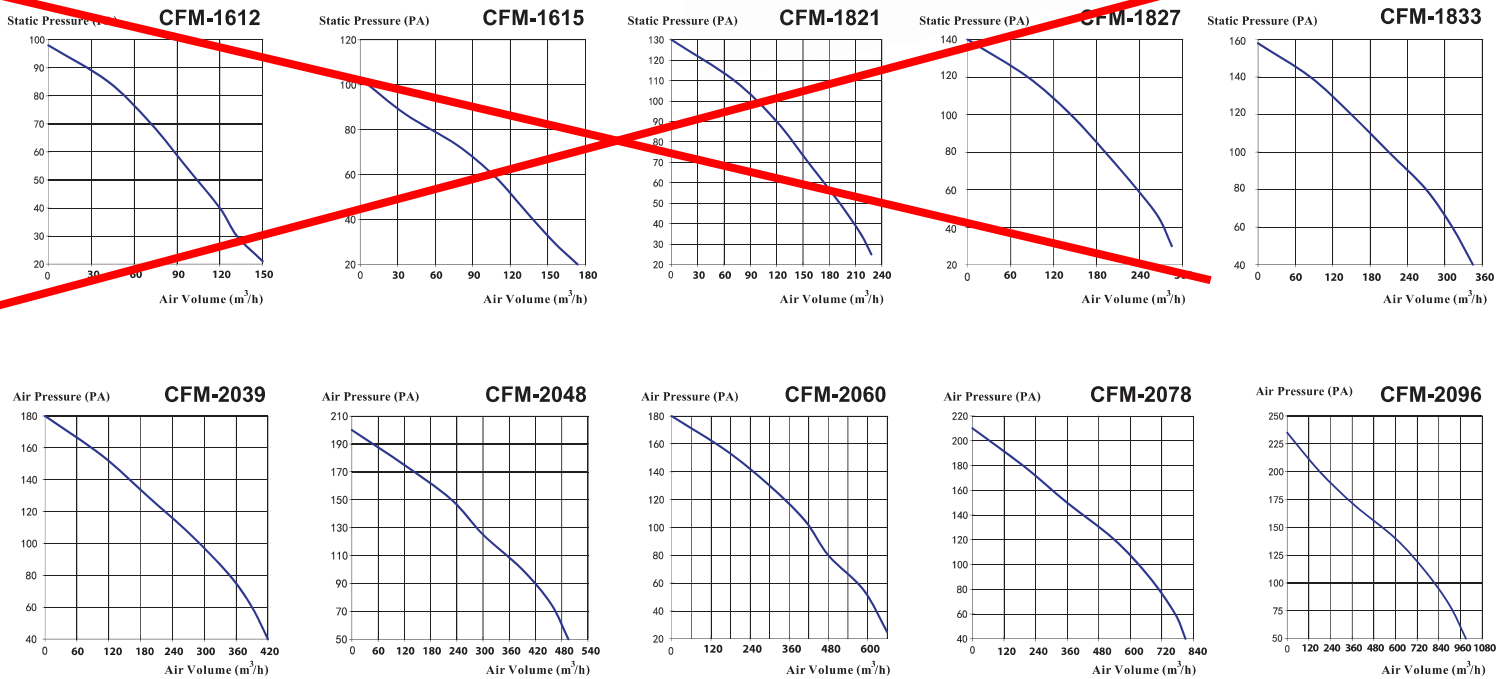

CFM

Dimension

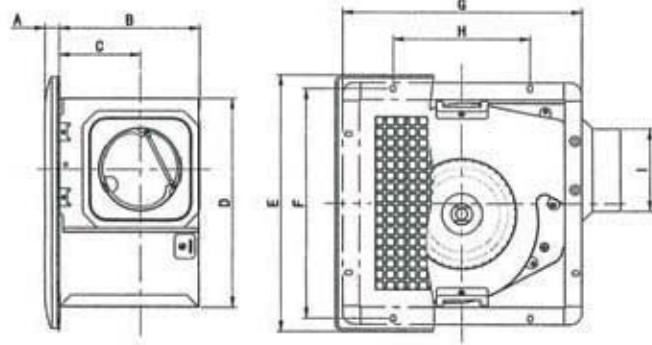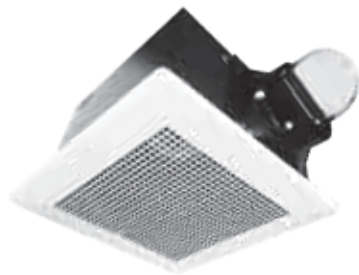

Model	Impeller (Ø mm)	Voltage (Ph/V/Hz)	Power (watt)	Speed (rpm)	Volume (m ³ /h)	Noise@1m dB(A)	Dimension (mm)									
							A	B	C	D	E	F	G	H	I	Louver size
CFM-1612	150	1/220/50	16	690	120	34	17	163	95	241	297	266	280	160	98	297
CFM-1615	150	1/220/50	19	780	150	37	17	163	95	241	297	266	280	160	98	297
CFM-1821	180	1/220/50	24	520	210	38	17	188	108	281	346	306	320	180	123	346
CFM-1827	180	1/220/50	30	640	270	41	17	188	108	281	340	306	320	180	123	346
CFM-1833	180	1/220/50	38	735	330	45	17	188	108	281	346	306	320	180	123	346
CFM-2039	200	1/220/50	45	600	390	42	17	228	115	311	370	336	350	200	148	370
CFM-2048	200	1/220/50	54	738	480	46	17	228	115	311	370	336	350	200	148	370
CFM-2060	230	1/220/50	85	730	600	50	17	233	123	388	476	411	425	240	198	476
CFM-2078	230	1/220/50	108	830	780	53	17	233	123	388	476	411	425	240	198	476
CFM-2096	230	1/220/50	164	980	960	58	17	233	123	388	476	411	425	240	198	476

SALES CONTACT



www.airmax-hvac.com



097-249-8789, 063-268-8080



@airmax (Line Official)



windcontrol.info@gmail.com



Address

เลขที่ 56/392 หมู่ที่ 12
ตำบลศรีชะอรเข้่น้อย
อำเภอบางเสาธง
จังหวัดสมุทรปราการ
10570

