

Spring-return actuator, combined with thermoelectric tripping device BAT (72°C), for fire and smoke dampers 90° in ventilation and air-conditioning systems.

- Torque 20 Nm / 20 Nm (see Service life)
- Nominal voltage AC/DC 24 V
- Control Open/close
- Mechanical interface Form fit 12x12 mm, non-continuous hollow shaft



## Technical data

Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2...28.8 V / DC 21.6...28.8 V
	Power consumption in operation	10 W
	Power consumption in rest position	2 W
	Power consumption for wire sizing	12.5 VA
	Power consumption for wire sizing note	Imax 8.3 A @ 5 ms
	Auxiliary switch	2 x SPDT
	Switching capacity auxiliary switch	1 mA...6 A (3 A inductive), DC 5 V...AC 250 V (II, reinforced insulation)
	Switching points auxiliary switch	5° / 80°
	Connection supply / control	Cable 1 m, 2 x 0.75 mm <sup>2</sup> (halogen-free)
	Connection auxiliary switch	Cable 1 m, 6 x 0.75 mm <sup>2</sup> (halogen-free)
	Cable length thermoelectric tripping device	1 m
Functional data	Torque motor	Max. 20 Nm (see Service life)
	Torque fail-safe	Max. 20 Nm (see Service life)
	Direction of motion motor	selectable by mounting L/R
	Manual override	with position stop
	Angle of rotation	Max. 95°
	Running time motor	<60 s / 90°
	Running time fail-safe	<30 s @ 20°C
	Sound power level, motor	55 dB(A)
	Sound power level, fail-safe	62 dB(A)
	Mechanical interface	Form fit 12x12 mm, non-continuous hollow shaft
	Position indication	Mechanically, with pointer
Safety data	Service life	Min. 10'200 safety positions @ 15 Nm (typically), followed by 50 safety positions @ 20 Nm (max.)
	Response temperature thermal fuse	Duct outside temperature 72°C Duct inside temperature 72°C (colour black)
	Protection class IEC/EN	III, Safety Extra-Low Voltage (SELV)
	Protection class auxiliary switch IEC/EN	II, reinforced insulation
	Degree of protection IEC/EN	IP54 IP protection in all mounting positions
	EMC	CE according to 2014/30/EU
	Low voltage directive	CE according to 2014/35/EU
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1.AA.B
	Rated impulse voltage supply / control	0.8 kV
	Pollution degree	3

Safety data	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature normal operation	-30...50°C
	Ambient temperature safety operation	The safety position will be attained up to max. 75°C
	Storage temperature	-40...50°C [-40...122°F]
	Servicing	maintenance-free
Weight	Weight	2.7 kg

## Safety notes



- The device must not be used outside the specified field of application, especially not in aircraft or in any other airborne means of transport.
- The actuator is adapted and installed on the fire and smoke damper by the damper manufacturer. For this reason, the actuator is only supplied directly to safety damper manufacturers. The manufacturer then bears full responsibility for the proper functioning of the damper.
- The two switches integrated in the actuator are to be operated either on power supply voltage or at safety extra-low voltage. The combination power supply voltage/safety extra-low voltage is not permitted.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

## Product features

**Mode of operation** The actuator moves the damper to the operating position at the same time as tensioning the return spring. The damper is turned back to the safety position by spring energy when the supply voltage is interrupted.

**Thermoelectric tripping device** Complies with the specific requirements of the standard ISO 10294-4.  
BAT: if the ambient temperature of 72°C is exceeded, then the duct outside temperature fuse will respond. If the duct inside temperature of 72°C is exceeded, then the duct inside temperature fuse will respond. When one of the thermal fuses responds, the supply voltage is interrupted permanently and irreversibly.

The LED is on when

- supply voltage is available
- the thermal fuses are OK and
- the test switch is not pressed.

Note: The function of the thermal fuses and the control key is only warranted if the actuator is connected to the supply voltage (LED on).

**Manual override** Without power supply, the actuator can be operated manually and fixed in any required position. It can be unlocked manually or automatically by applying the supply voltage.

**Signalling** Two microswitches with fixed settings are installed in the actuator for indicating the damper end positions. The electrical contacts of these microswitches are equipped with a gold/silver coating that permits integration both in circuits with low currents (mA range) and in ones with larger-sized currents (A range) in accordance with the specifications in the data sheet. It should be noted with this application however that the contacts can no longer be used in the milliamperage range after larger currents have been applied to them, even if this has taken place only once.

The position of the damper blade can be read off on a mechanical position indication.

**Standards / Regulations**

The design of the actuator is based on the specific requirements from the European standards:

- EN 15650 Ventilation for buildings – Fire dampers
- EN 1366-2 Fire resistance tests on service installations  
(Part 2: Fire dampers)

- EN 13501-3 Fire classification of construction products and building elements

(Part 3: Classification using data from fire resistance tests on products and elements used in building service installations: fire resisting ducts and fire dampers)

**Recommendation for application**

The regular operational check (open/close control of the fire damper) enhances the safety of people, animals, property and the environment. Unless other requirements are stipulated – e.g. in the damper manufacturer's operating instructions – Belimo recommends the performance of a monthly operational check. Fire damper actuators from Belimo are designed in accordance with service life specifications contained in the technical data sheet for regular operational checks. Notes for regular operational checks can be found in the European Product Standard for Fire Dampers (EN 15650) under "Maintenance information".

**Delivery notes**

Incl. Hand crank, Pointer, Protective bag, Form fit insert 12/10 mm

**Accessories**
**Electrical accessories**
**Description**
**Type**

Auxiliary switch 2 x SPDT	SN2-C7
Thermoelectric tripping device with control key, Duct inside temperature 72°C (colour black), Duct outside temperature 72°C	BAT72
Thermoelectric tripping device with control key, Duct inside temperature 72°C (colour black), Duct outside temperature 72°C	BAT72/9
Blanking cover for BAT (without thermal fuse for duct inside temperature), Multipack 20 pcs.	ZBAT0
Spare tripping element for BAT, Duct inside temperature 72°C (colour black)	ZBAT72
Spare tripping element for BAT, Duct inside temperature 72°C (colour black)	ZBAT72/9
Spare tripping element for BAT, Duct inside temperature 95°C (colour grey)	ZBAT95
Spare tripping element for BAT, Duct inside temperature 95°C (colour grey)	ZBAT95/9
Spare tripping element for BAT, Duct inside temperature 120°C (colour orange)	ZBAT120
Spare tripping element for BAT, Duct inside temperature 140°C (colour red)	ZBAT140
Cable set with plug 0.5 m for communication and power supply unit	ZST-BS

**Mechanical accessories**
**Description**
**Type**

Bracket for SN2-C7 for BF	ZSN-BF
Adapter, for form fit 12 mm on round shaft 18 mm, L = 33 mm	ZA18-BF
Adapter, for form fit with clamp for round shaft 10...20 mm / square 10...16 mm	ZK-BF
Pointer 12x12 mm	ZZ12-B
Hand crank 40 mm	ZK1-B
Hand crank 70 mm	ZK2-B
Protective bag with wire, Multipack 100 pcs.	ZSD-B.1

**Electrical installation**

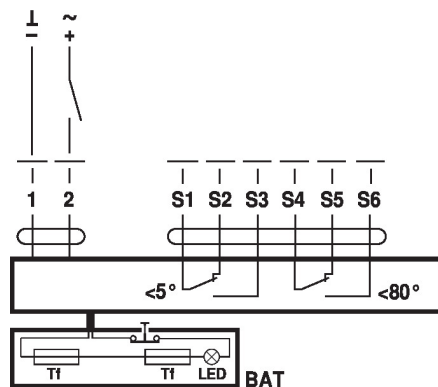

**Supply from isolating transformer.**

**Parallel connection of other actuators possible. Observe the performance data.**

**Combination of power supply voltage and safety extra-low voltage not permitted at the both auxiliary switches.**

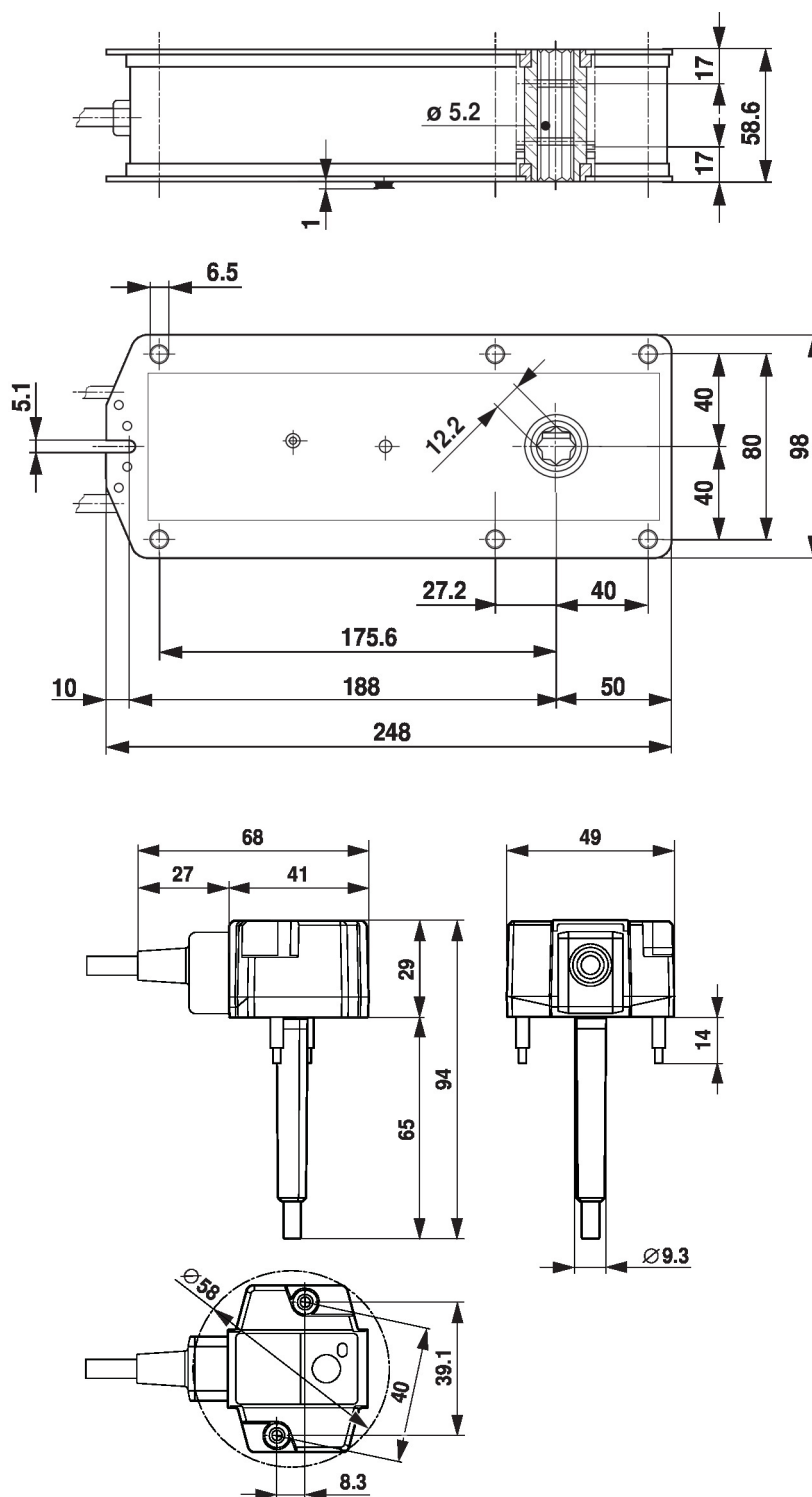
**Wiring diagrams**

AC/DC 24 V, open/close


**Cable colours:**

1 = black  
 2 = white  
 S1 = violet  
 S2 = red  
 S3 = white  
 S4 = orange  
 S5 = pink  
 S6 = grey  
 Tf: Thermal fuse (see "Technical data")

## Dimensions



# SALES CONTACT



[www.airmax-hvac.com](http://www.airmax-hvac.com)



080-614-4944, 063-268-8080



@airmax (Line Official)



[windcontrol.info@gmail.com](mailto:windcontrol.info@gmail.com)



Address

เลขที่ 56/392 หมู่ที่ 12  
ตำบลศีรษะจรเข้น้อย  
อำเภอบางเสาธง  
จังหวัดสมุทรปราการ  
10540

